


ROSS Offers a Wide Range of Products for Base or Line Mounting

Features of ROSS Base-Mount Valves

1. All piping is to the base, not the valve, for easy valve removal and servicing.
2. Valves mount on standard ISO, ANSI, or SAE bases.
3. Available in poppet, stainless steel spool & sleeve, or resilient seal spool constructions.
4. Valves are fully-interchangeable with any other valves using a standard mounting interface.
5. Valves are easily manifold mounted, for compact multi-valve installations.
6. Two and three position valves available in all sizes.
7. Port sizes up to 1 1/2", C_v ratings up to 22.
8. Electrical connections provided by body-to-base/plug-in base (ANSI or ISO 5599/II), drop-cord plug (ISO5599/I), and 3 or 5-pin connectors (SAE).
9. Variety of interposed control devices are available.

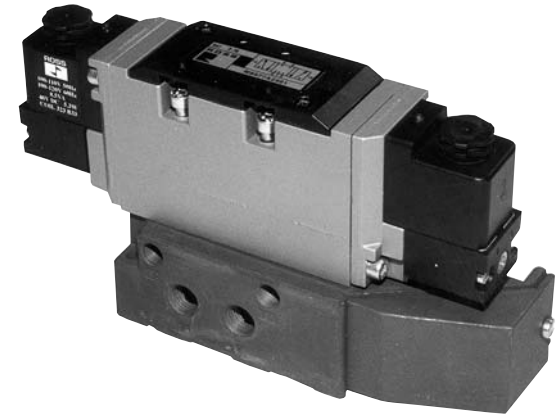

Base-Mount

